



The PLG 2000 is a cold atomizer intended for use in air-conditioned rooms. If the room cannot be air-conditioned, then a heatable version of the device should be used, e.g., PLG 2000 H.

MODEL VARIATIONS



PLG 2000 H

Heated version of the PLG 2000 up to 100°C



PLG 2000 HS

Heated version of the PLG 2000 with automatic refill unit

DESCRIPTION

The PLG 2000 is a cold atomizer intended for use in air-conditioned rooms. If the room cannot be air-conditioned, then a heatable version of the device should be used, e.g., PLG 2000 H.

AEROSOL GENERATOR FOR THE DEFINED ATOMIZATION OF OILS

The liquid to be dispersed is simply filled in the reservoir. The nozzle system developed by Palas® is immersed in the liquid. This nozzle system is based on the Laskin principle and guarantees extremely precise dosing constancy with uniform particle size. The mass flow is adjusted using the volume flow through the nozzle. A pressure regulator and a manometer on the device control the volume flow.

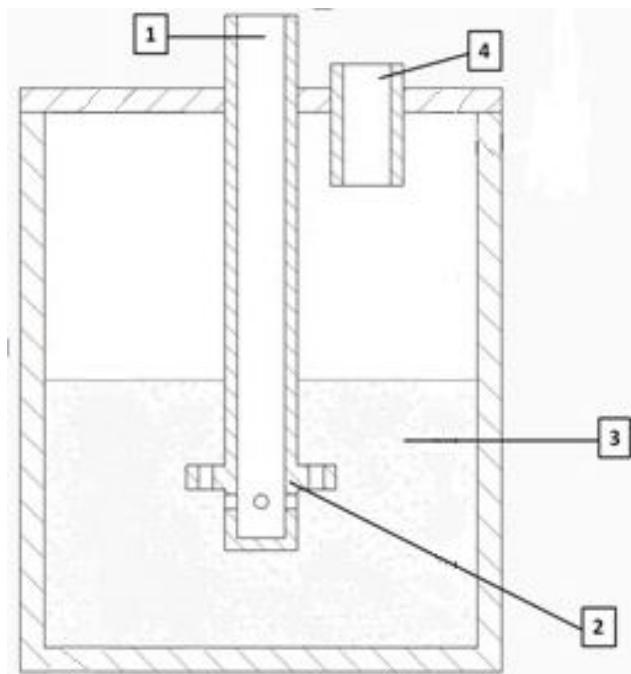


Fig. 2: Functional principle of the PLG series

- 1) Compressed air
- 2) Special Laskin nozzle
- 3) Aerosol substance
- 4) Aerosol outlet

This nozzle system is based on the Laskin principle and guarantees extremely precise dosing constancy with uniform particle size (see Fig. 3).

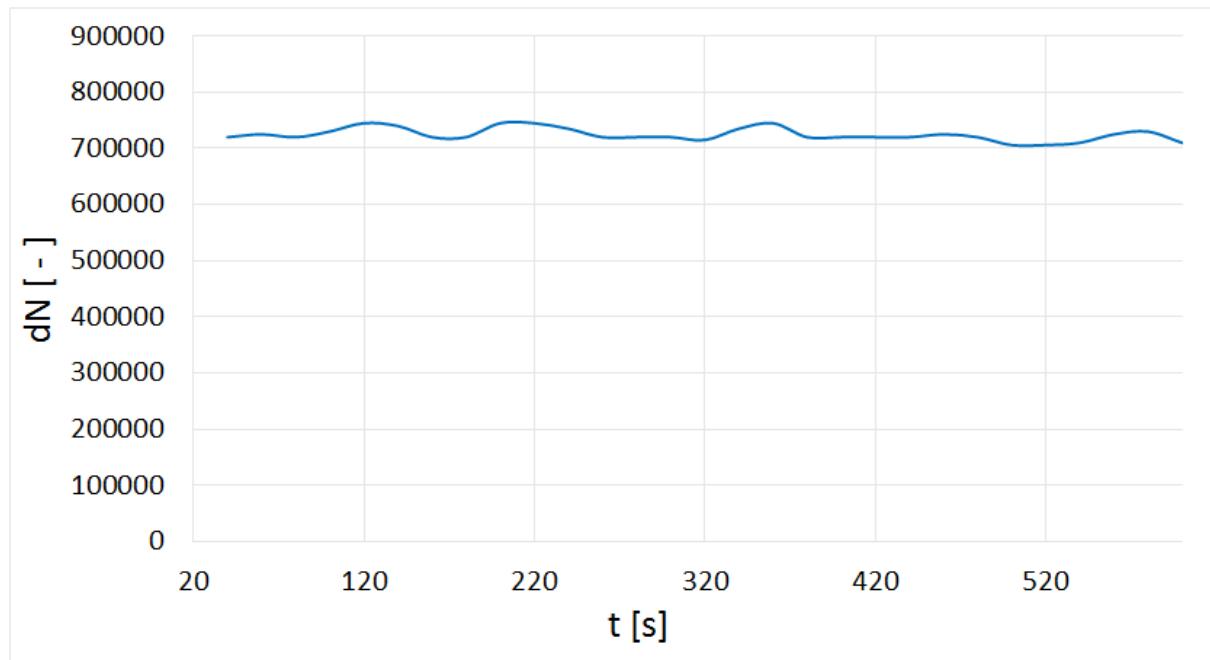


Fig. 3: Highly constant particle concentration over time at a resolution of 30 s

The PLG 2000 generates mass flows of up to approx. 20 g/h max. (depending on the aerosol substance in use).

BENEFITS

- Excellent short-term and long-term dosing constancy
- Best reproducibility with respect to particle size distribution and particle concentration
- Large mass volume range (very low and very high)
- Robust design (optionally resistant against chemically aggressive liquids)
- Compact and light
- Easy to operate, proven in industrial applications
- Reliable function
- Low maintenance

DATASHEET

| | |
|---------------------------------|---|
| Volume flow | 10 – 35 l/min |
| Weight | Approx. 9 kg |
| Mass flow (particles) | 20 g/h (white oil) |
| Aerosol outlet connection | $\varnothing_{\text{inside}} = 9 \text{ mm}$, $\varnothing_{\text{outside}} = 12 \text{ mm}$ |
| Mean particle diameter (number) | 0.4 μm (DEHS) |
| Filling quantity | 300 ml |
| Dimensions | 300 • 330 • 270 mm (H • W • D) |

CASE STUDIES

- Filter industry/oil separators
 - Determination of separation efficiency
 - Determination of fractional separation efficiency
 - Loading test
- Test of cooling lubricant separators
- Comparison of particle measurement devices
- Tracer particles
- Flow visualization



Mehr Informationen:
<https://www.palas.de/product/plg2000>