

enLink Air

Wireless Indoor Air Quality Monitor


Synetica's enLink Air is a wireless, indoor air quality monitor for real-time, continuous measurement of air pollutants.

Designed and manufactured in the UK, the enLink Air allows the easy visualization and analysis of key environmental parameters including temperature, relative humidity, oxygen, carbon dioxide, carbon monoxide, VOC's, ozone, particulate matter, light level plus many more.

Using the latest gas sensing technology, the enLink Air provides excellent accuracy and extended instrument longevity. Incorporating long range LoRa™ wireless, the enLink Air Indoor Air Quality Monitor can transmit data for up to 16km with building, interior penetration of 1-2 km without repeaters.



Sensed Parameters

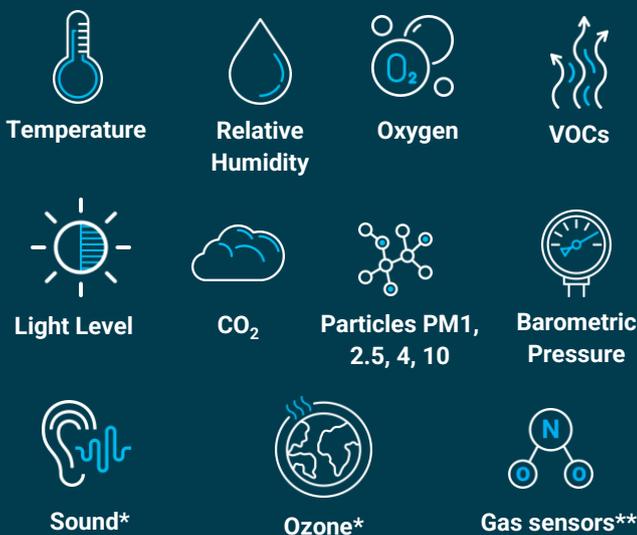

Key Features

-  Detailed, accurate measurements
-  Key environmental parameters monitored
-  Stylish, discreet design
-  Easy configuration via USB
-  LoRa™ wireless, up to 16km range
-  Real-time information
- 

* Model dependent

** Including CH₂O, CO, NO₂, SO₂, H₂S

enLink Air – Wireless, Indoor Air Quality Monitor

- Established in 2008, the engineering team at Synetica have many years experience in monitoring and analysing critical environmental information for the facilities management, commercial and industrial sectors.
- Many businesses are monitoring and regulating air quality in order that they comply with increasingly stringent government standards or to simply negate the effects of contaminated air on public and employee health.
- Synetica's air monitoring solutions integrate seamlessly with green building design and smart technology platforms helping companies achieve WELL® compliance and supporting national air pollution control schemes.
- Combining our extensive manufacturing capabilities with our acquired knowledge, we work with a diverse range of customers from power generation plants and retail outlets, through to large scale public infrastructure projects and prestigious commercial property developments.

If you have a specific requirement for an air, environmental, energy or asset monitoring solution, contact us to learn more about how our precision monitoring technologies could help.

Specifications

Temperature	Accuracy: $\pm 0.2^{\circ}\text{C}$ (typical) Range: -20°C to $+50^{\circ}\text{C}$
Humidity	Accuracy: $\pm 2\%$ (typical) Range: 0 – 100% RH
Pressure	Accuracy: $\pm 0.12\text{hPa}$ (equivalent to $\pm 1\text{m}$ in altitude) Range: 300-1100hPa
Light level	Accuracy: $<4\%$ error Range: 0.01 – 83,000 lux
Particulate matter	MCERTS Certified Particles measured: PM0.5, PM1, PM2.5, PM4 & PM10 Conc ⁿ range: 0 – 1000 $\mu\text{g}/\text{m}^3$
Sound (optional)	Sensitivity: $-26\text{dB FS} \pm 1\text{dB}$ Dynamic range: 91dBA
O₂	Accuracy: $<2\%$ ppO ₂ , pressure $\pm 5\text{ mbar}$ Range: 0 – 25% O ₂
VOC's	VOC IAQ Index and ppm (bVOC) Range: 0 – 500 IAQ
CO₂	Accuracy: $\pm (30, +3\%) \text{ ppm}$ (typical) Range: 0 – 5,000 ppm

*Refer to enLink Air Datasheet for additional gas modules and specifications

About us



Scientific & Environmental Monitoring Technologies



Australia Wide
Phone: 1300 025 780

Contact Details
Phone: + 61 3 9124 9886
Email: sales@alphascientific.com.au
Website: www.alphascientific.com.au

